# **Waste Minimization in Hospitals**

# (Case Study: Shahid Akbar Abadi Hospital)

Samin Hojati <sup>1+</sup>, Seyed Mostafa Khezri <sup>2</sup>, Zeynab Erfani <sup>3</sup> and Lila Asad Amraji <sup>3</sup>

<sup>1</sup> M.Sc Student, Department of Water Resources, Faculty of Environment, Science and Research Branch, Islamic Azad University, Tehran, Iran

**Abstract.** Nowadays, hospital wastes are dangerous for human health in developing countries. Construction waste is becoming a serious environmental problem in many large cities in the world (Chen et al., 2002). Hospital wastes because of its production nature usually have high potential to damage environment. Minimization in production process of hospital wastes can decrease wastes and it has economical profits. Goal of this study to find methods to minimize the special hospital wastes, therefore we introduce different part of a pilot hospital (Akbar Abadi hospital) and checking statics status produce and segregation stages for special wastes. After doing research, biochemical laboratory part because of having sn and solphore compounds in wastes of consumed kit is important part of hospital for minimize special hospital wastes. By changing technology and usage of new equipment (Ecom and Auto analyzer) in biochemical laboratory producing special wastes caused by using kit like sugar, cholesterol, Triglyceride, Ore, Uric acid, SGOT-SGPT-ALKP, Calcium and Phosphorus ,can be minimize equal to 55 and 83 liters wastes in a year. In hormonology laboratory with use of automatic washer, amount of produce wastes equal to 19,800gr in year.

**Keywords:** Dispelling hospital wastes, Minimization of wastes, Spectrophotometer, Ecom and Auto Analyzer.

### 1. Introduction

According to research conducted by the World Health Organization (WHO), between 75 to 95% of produced residuals in hospital or health units have no risk. These residuals are produced by administrative and housekeeping activities, and the remaining 10 to 25% are considered dangerous which refers to the industrial side products and hospital wastes, home, business centers, training centers for health, safety, human property and environmental risk. They are wastes including infectious, pathological, sharp, medicinal, Genotoxic, chemical materials and also containing heavy and radioactive metals.

The selected method is based on the waste disposal technology of the country, the climate and consideration of all conditions for using a suitable method with the highest efficiency and least pollution.

The aim of this study is investigation of the economical efficiency of the minimization of hospital waste production and knowledge of various sectors and the status of statistical production and waste separation in Shahid Akbar Abadi Hospital located in Tehran. Currently, 2 major methods of processing and managing hospital waste are used, which include: saving method in the source and burning garbage.

182

<sup>&</sup>lt;sup>2</sup> Assistant Professor, Islamic Science and Research Branch, Islamic Azad University, Tehran, Iran <sup>3</sup> M.Sc Graduated, Science and Research Branch, Islamic Azad University, Tehran, Iran

<sup>&</sup>lt;sup>+</sup> Corresponding author. Tel.: + (989121757842); fax: + (please specify). *E-mail address*: (samin6662002@yahoo.com).

According to World Bank 2005, the current production of hospital wastes in Iran has reciprocal trend with respect to the estimates of WHO for developing countries. (Dehghani2008) found that the amount of waste produced in the teaching hospitals of Tehran University of Medical Sciences is 4.42kg/bed/day. In other words, about 75% of wastes are hazardous and of 25% are normal. Based on the same report, it is unlikely that instruction of segregation and separation in the origin has enough efficiency. Another important point is that the production of hospital waste in Tehran is estimated about 2 to 3 times higher than other developing countries located in Middle East and Africa. Each active hospital bed produces a figure around 2.5 to 3 kg of waste per day. While in other cities such as Cairo and Beirut, it is about 1.1 to 1.3 Kg.

The significance of this study is to address a point that has not already considered; the economic aspects and making profit and calculating values of decreased hospital costs and comparing different modes of utilizing different devices and its impact on reducing current hospital costs and the more profitability. This can be an incentive tool for managers and official heads of hospitals and organizations and encourage them to use advanced equipment and devices.

#### 2. Materials and Methods

This research has been conducted in "shahid Akbar Abadi" hospital and maternity located southwest of Tehran in the summer of 1386. Hospital is belonged to the Government and it is first class. Number of approved hospital beds are 320, which currently has 213 active beds. Hospital building has 4 floors and consists of 7 sections. The number of employees is equal to 260.

Data collection of hospital waste has been done by frequent field visits and taking list of materials from the drug store located in the hospital which will be distributed to all sectors and it is based on the random removal of wastes and their separations and also interview with the hospital staffs in different sectors.

The average daily hospital waste outlet in "Shahid Akbar Abadi" is 603 Kg which 315 Kg of them are infectious, hazardous and sharp wastes and 288 Kg are the regular home residuals. Amount of weight and volume and density of the produced wastes in this study are approximately 220.09 tons, 5.15 m³/day and 130 kg/ m³ respectively. 52% of the produced wastes are infectious and 48% are common and home residuals.

In addition, according to the classification done by (WHO, 1983) it was found that 61.1% of wastes are household and 38.9% are hazardous. (Hassan, 2008) showed that the amount of household wastes in Bangladesh is 77.4% and other 22.6% are hazardous wastes.

Infectious wastes are: operating room wastes, delivery room, treatment, ICU part, NICU part, the dressing room, pathology department, laboratory, isolation room, expired drug, textiles and clothing contaminated with blood, gas and cotton used for dressing, laboratory samples and related culture environment, plastic materials including nylon, gloves, urine bag, Infusion Set, sickroom parts, needles and razor.

Plastic wastes makes up 19% of hospital wastes and this high unexpected percentage is due to the overuse of non-recyclable trash instead of recycling and reusing for different purposes. These results are contrary to findings of (Abdulla, 2008) and (Bdure, 2007) in Jordan hospitals. (Dehghani, 2008) reported in Iran hospitals that the plastic contents are 24%, 27%, 29% respectively. Glass makes up over 18.7% of hospital wastes which is due to the high number of serum and empty vial. Plastic wastes have the highest percent of 2.5% which are observed in hospitals with dialysis services; including rubber filters, rubber tubing and rubber gloves.

#### 3. Results

## 3.1. Ordinary Waste minimization practices in the "Shahid Akbar Abadi" hospital

### 3.1.1. Radiology Section

In Radiology Sectors, Radiology films due to have silver are separated and sold separately. Additional fixation solution also is not discarded and will be sold. These section's wastes are chemical wastes and they are in the group of infectious wastes. Their approximated weights appear 2 Kg daily.

#### 3.1.2. Food wastes

Bread is removed from the food wastes and sold separately. 3 Kg of common wastes per day are including bread. Overally, 5 Kg of wastes has been reduced daily in the "Shahid Akbar Abadi" hospital.

## 3.2. Wastes minimization in the "Shahid Akbar Abadi" hospital

### 3.2.1. Plastics Waste, paper and paperboard, glass, metal, cotton

The approximated weight of these wastes comprises about 156 Kg every day. This group can be sold. The proper separation in the origin in addition to reducing wastes and increasing environmental beneficial effects have economic exploitation. This work takes place in the semi-functional. These materials are sent to landfill due to lack of proper separation from the remaining wastes.

### 3.2.2. Minimization measures in the laboratory

Using Device called the Auto analyzer and auto metal system instead of manual methods in biochemistry and Hematology laboratories reduces consumption of laboratory kits and also the number of cleaning pipes and increases water savings. Overally, the benefits of this machine in minimization are; reduce the purchase of materials and laboratory kits, full use of older material and kit, regular control on drug use and laboratory kits before reaching their expirations, full use of all materials in kits containing materials and laboratory glass

# 3.2.3. Drug minimization measures


In this section by regular inspecting on medicines and also checking their expiration dates, we can significantly decrease the production of this type of wastes.

## 3.3. Minimization measures in bio-chemistry lab

If you use an Ecom machine instead of Spectrophotometer, the average consumption of solution and kits will be reduce to half. Due to the availability of cyanide and sulfur compounds in solution and kits and also entering of these wastes directly into urban sewage, minimization of consumption in this section is very important. Auto analyzer machine is new and modern system. By using this machine, the consumption of materials and laboratory kits will be reduce to half of what it is for Ecom machine. Other advantages of this device is to reduce personnel required for the lab work which in turn reduces the risk of personnel's contacting with cyanide and sulfur material and their related illnesses. Also, answer to the testing sample for Ecom device is equal to 4 or 5 days. By using the auto analyzer system this time is reduced to 1 day.

Table 1	- cost of kits consum	ntion for Cno	atroph atomator	Ecom and Auto	A malr.
i anie i	- cost of kits consum	ibtion for Spe	ctrophotometer.	Ecom and Auto .	Anaivzer

Type of machine	Cumulative daily tests	The volume of consumed kits(cc)	Cost of each kits (Rial)	Cost of consumed daily kits(Rial)	volume of consumed monthly kits(cc)	Cost of consumed monthly kits(Rial)	volume of consumed annually kits(cc)	Cost of consumed annually kits(Rial)
Spectrophotometer	153	306	14,840	411,720	9,180	12,351,600	110,160	148,219,200
Ecom	153	153	14,840	205,860	4,590	6,175,800	55,080	74,109,600
Auto Analyzer	153	76.5	14,840	102,930	2,295	3,087,900	27,540	37,054,800

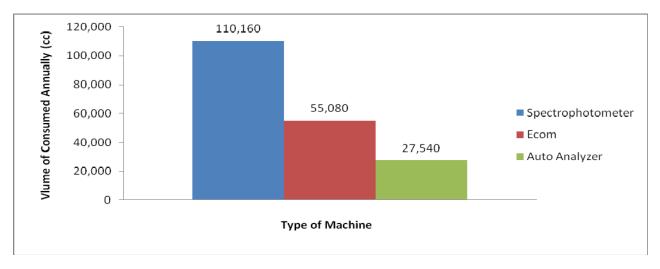

### 4. Conclusion and Discussion

- 1. Spectrophotometer is used in bio-chemistry laboratory for diagnostic testing of kits, which due to being old device, its intake kits and special wastes due to consumption of fine kits, in day, month and year is equal to 306 cc, 9,180cc, and 110,160cc respectively.
- 2. In the case of using the device called Ecom in the Bio-Chemistry Laboratory, amount of waste from small consumable kits in day, month and year is 153cc 4,590cc 55,080cc respectively.
- 3. Auto analyzer as a new device available for analysis in bio-chemistry laboratories, reaches the amount of waste from small consumable kits on the day, month and year to 76.5cc, 2,295 cc and 27,540cc respectively.
- 4. Using the Ecom device instead of Spectrophotometer device in bio-chemistry Laboratory reduces the special wastes production or consumption of kits in 55,080 cc.
- 5. Using the Auto analyzer device instead of Spectrophotometer device in bio-chemistry Laboratory reduces the special wastes production or consumption of kits in 82,620 cc.
- 6. Using the automatic washer in Hormone Laboratory Studies causes minimization of 19,800 gr in plastic wastes production.

According to calculations in Table 1, volume of the residual resulting from the use of laboratory kits by Spectrophotometer equals to 110,160cc which is equivalent to 110.16 lit/year. By using the Ecom device instead of Spectrophotometer amount of waste reduction is equal to 55,080cc (55.08 lit/year) and by using the auto analyzer device instead of Spectrophotometer amount of waste reduction is equal to 82, 620cc (82.62 lit/year).

# 5. Suggestions

The following solutions to remove obstacles to make progress in hospital waste management are recommended:

- 1. Calculate and monitor economical benefits from waste minimization in hospital.
- 2. More accurate monitoring and controlling of hospital waste separation process by the ministry of health and medical education and environmental protection agency.
- 3. Materials management in a way that the 3 primary criteria of using less, reusing and recycling to be considered.
- 4. Review reasonably related laws to facilitate the process of reducing the danger of hospital waste and removing their problems.
- 5. Review the laws in the process of the hospital waste separation at source and related definitions to prevent from confusion of officials responsible for hospital waste separation.

- 6. Participation of private sector's specialists in the process of hospital waste management.
- 7. Domestic and foreign investment to import modern technology in the country by public and private sector.
- 8. Meetings with managers and officials for a closer relationship and familiarity with available scientific and practical solutions.
- 9. Helping of the University to improve the implementation of the plans and suggests new scientific recommendations.
- 10. Advertising extensively by the public media for more awareness of the public.
- 11. Using new technology capable of reducing waste in different parts of the hospital, especially areas with potential of production of hazardous wastes.

## 6. References

- [1] Abdoli M.A., 1380. Management of Urban Wastes, Organization of Country Municipalities
- [2] Abdulla, F., Abu Qdais, H., Rabi, A., 2008. Site investigation on medical waste management practices in northern *Jordan*. Waste Management 28 (2), 450–458.
- [3] Afhami H., 1381. Prevention and Control of Hospital Infections, Teymour Zadeh publishing.
- [4] Amooyi A.I., 1382. Situation Consideration on Gathering, Keeping and Transportation of Solid Wastes in Hospital, Shahid Beheshty Medical University.
- [5] Asadi M., 1379. Managment of Hospital Wastes, Department of Environment.
- [6] Carncross, Feachen .R.g. Hospital waste management, Mc Herly. 2001.
- [7] Chen Z, Li H, Wong CTC. *An application of bar-code system for reducing construction wastes*. Automat Construct; 2002, 11(5): 521–33.
- [8] Dehghani, M.H., Azam, K., Changani, F., Fard, D.E. *Assessment of medical waste*. Iranian Journal of Environmental Health Science & Engineering. 2008, 5 (2). 131–136.
- [9] Esmaeili A. Contaminant, Health and Standard in Environment, Tarbiat Modares University. 1381.
- [10] Gotass .H.B. Sanitary and Disposal and Reclamation of Organic Waste.
- [11] Guthrie P, Woolveridge AC, Patel VS. *Waste minimization in construction: site guide. London: Construction.* Industry Research and Information Association. 1999.
- [12] Information Collection of Questions about hospital wastes. Ministry of Health and Medical Education. 1382.
- [13] Magda Magdy Abd El-Salam. Hospital waste management in El-Beheira Governorate, Egypt. 2009.
- [14] Mohamadi, Gholi Zadeh. Principles management of solid wastes & Surplus in Medical Centers & Laboratories, Shahr Aab publishing. 1379.
- [15] Moller .D.w. Environmental Health, Revise Edition. 1999.
- [16] Monavari M. Pattern Evaluation of Environmental Effects on Burial Locations for Urban Wastes, Recycling Organization of Municipality. 1381.
- [17] Omrani Q.A. Solid Wastes, Azad University publishing. 1380.
- [18] Rawshan Ara Beguma, Chamhuri Siwar, Joy Jacqueline Pereira, Abdul Hamid Jaafar. *A benefit–cost analysis on the economic feasibility of construction waste minimization: The case of Malaysia.* 2006.
- [19] Sadough M. Management directions of Hospital Wastes, Mehr publishing. 1379.
- [20] World Bank report, 2005.
- [21] WHO, 1983.
- [22] Yong-Chul Jang a, Cargro Lee a, Oh-Sub Yoon b, Hwidong Kim c. Medical waste management in Korea. 2006.